


Custom Bow Pulpit Measuring Guide

Customer Name _____

Model Number J/30

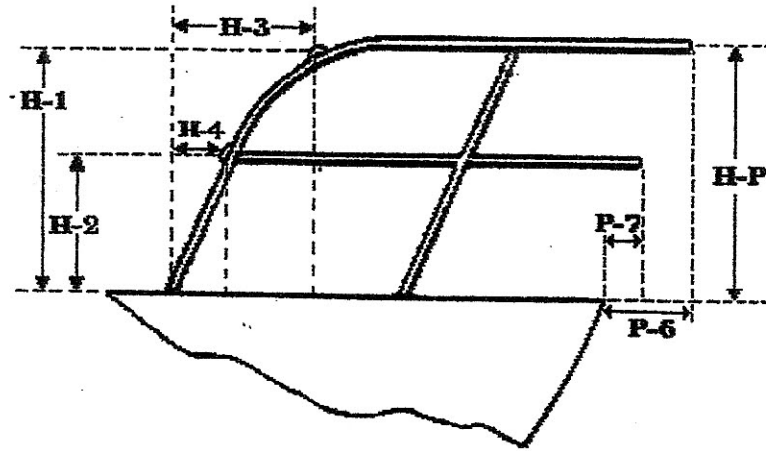


Required for all models

- H-P 29" Deck to center of top rail of pulpit.
 H-1 25" Deck to center of top eye.
 H-3 10.5" Center of top eye to vertical line extended from center of aft base.
 P-6 13.5" Bow to the vertical line extended down from center of top rail nose.

Required for double railed pulpits and single railed pulpits with double lifeline eyes.

- H-2 13" Deck to the center of intermediate eye.
 H-4 2.75" Center of intermediate eye to vertical line extended from center of aft base.
 P-7 N/A Bow to vertical line extended from center of intermediate rail nose.

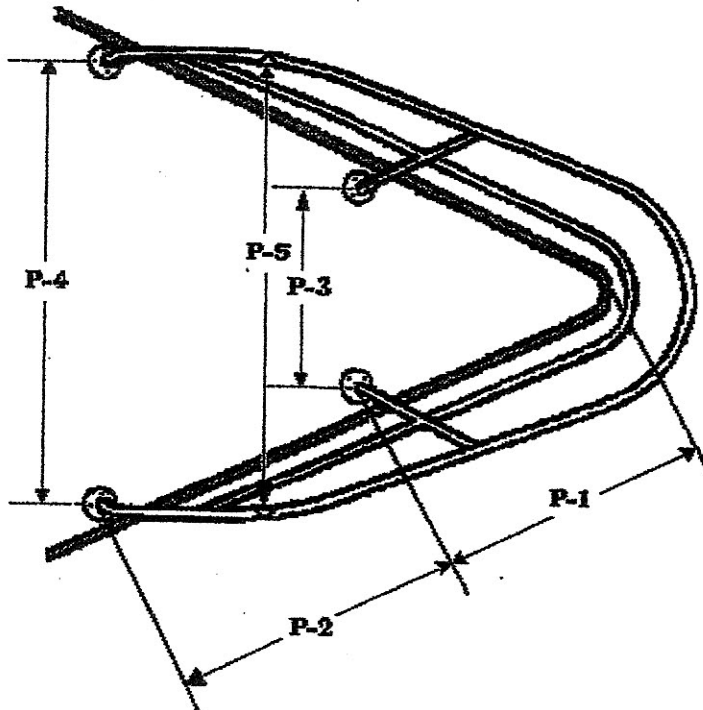

Required for all models

- P-1 10.5" Bow to centerline of forward base.
 P-2 26" Centerline forward base to centerline aft base.
 P-3 6" Beam centerline of forward bases.
 P-4 28.5" Beam centerline of aft bases.
 P-5 45" Beam centerline of top lifeline eyes.

If bases are welded-on plates:

Specify deck camber at P-4 _____ P-3 _____